

Bush Hog® TOUGH RTS Series Rotary Tillers

BUSH HOG® TOUGH FEATURES

TOUGH #80 Chain Drive

TOUGH Heavy Duty Gearbox

TOUGH High Carbon, Long Life Steel Blades


TOUGH Triple Sealed Ball Bearings On Rotor Shaft

TOUGH Heavy Duty Adjustable Skid Shoes

TOUGH Heavy Duty A Frame Construction

TOUGH Double Strap Hitch

TOUGH Powder Coat Paint

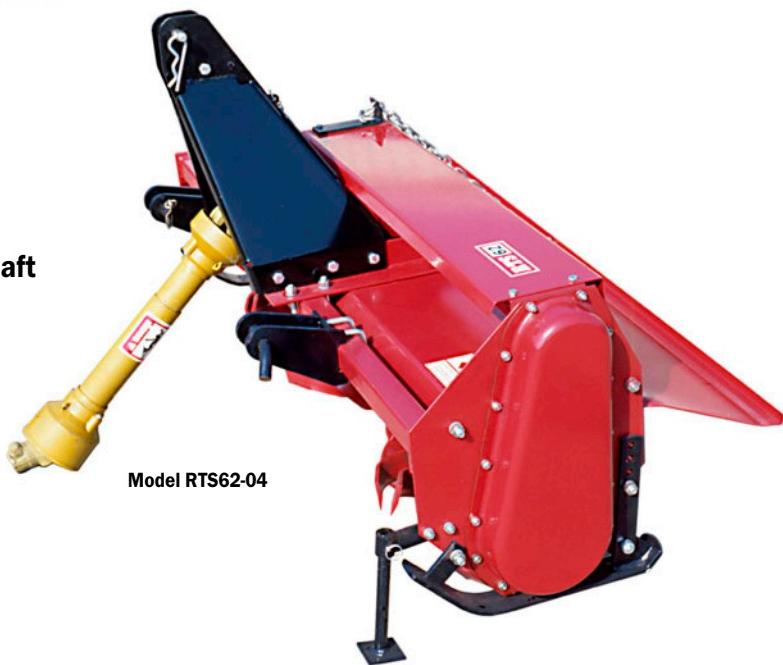

MODELS	RTS40-04	RTS50-04	RTS62-04	RTS74-02
Tilling Width	38 inches	50 inches	62 inches	74 inches
Number Blades	24	32	40	48
Tractor HP Range	15 - 24 PTO	20 - 30 PTO	30 - 40 PTO	35 - 50 PTO
Type Hitch	Category I, 3 Point	Category I, 3 Point	Category I, 3 Point	Category I, 3 Point
Offset	6 inches	12 inches	12 inches	18 1/4 inches
Number of Flanges	6	8	10	12
Rotor Speed	246 RPM/540 PTO	246 RPM/540 PTO	246 RPM/540 PTO	246 RPM/540 PTO
Type of Blades	L Type	L Type	L Type	L Type
Power to Rotor Transmission	Chain Drive (#80)	Chain Drive (#80)	Chain Drive (#80)	Chain Drive (#80)
Depth of Cut	7 inches Max. (All 4 Models have 4 position skids)			
Driveline	Shear Bolt Standard, Slip Clutch Optional			
Approximate Weight	366 lbs	418 lbs	470 lbs	532 lbs
Warranty	1 year limited warranty			
FEATURES	Available in major tractor colors			